

**Product Code:**

iDMS4046-01-R8-0.5-R2



**Picture:**




**Specification:**

Rated Power	(W)	0.25W
Max Input Power	(W)	0.5W
Rated Impedance	(Ω)	8±20%@1V, 2KHz
Resonance Frequency	(Hz)	500±20%Hz@1V
SPL at 0.1m 0.1W	(dB)	87±3dB at 0.8k, 1.0k, 1.2k&1.5kHz Average
Rated Freq. Range	(Hz)	300Hz~20000Hz
Buzzes & Rattles		Should not be audible at 1.5V sine wave between 300Hz~6KHz
Operating Temperature	(°C)	-20°C ~ +50°C
Storage Temperature	(°C)	-30°C ~ +60°C
Weight	(g)	3.5g
RoHS		Yes

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

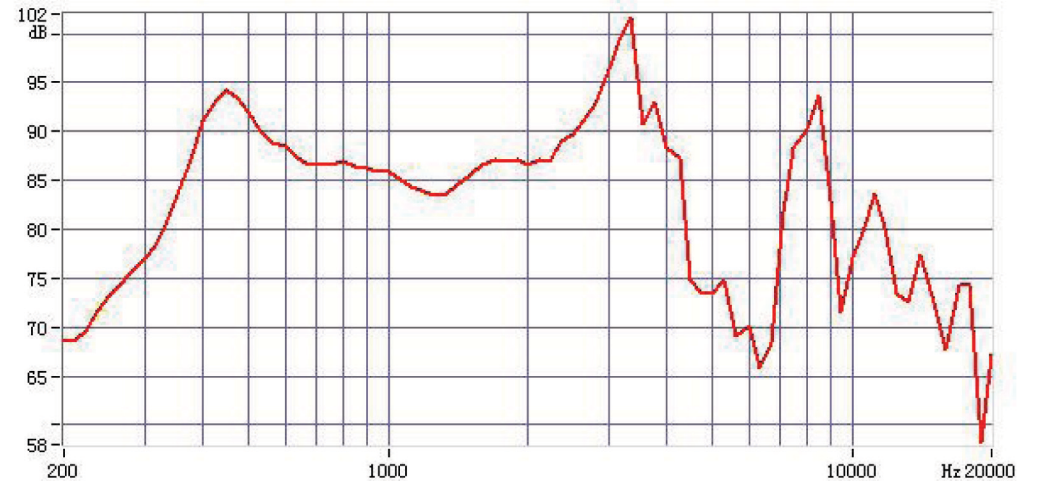

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

