


**Product Code:**

iXD-2308-R



**Picture:**

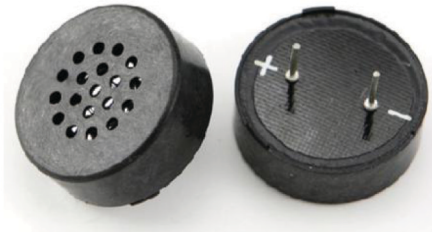


**Specification:**

Rated Power	(W)	0.15
Max Input Power	(W)	0.2
Rated Impedance	(Ω)	8±20% at 1KHz
Resonance Frequency	(Hz)	1500±20%
SPL at 0.1m 0.1W	(dB)	≥80 @1500Hz,sine wave
Rated Freq. Range	(Hz)	500~4000
Buzzes & Rattles		Should not be audible at 2V sine wave between 300~6000Hz
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	3.0
RoHS		Yes

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Frequency Response:**

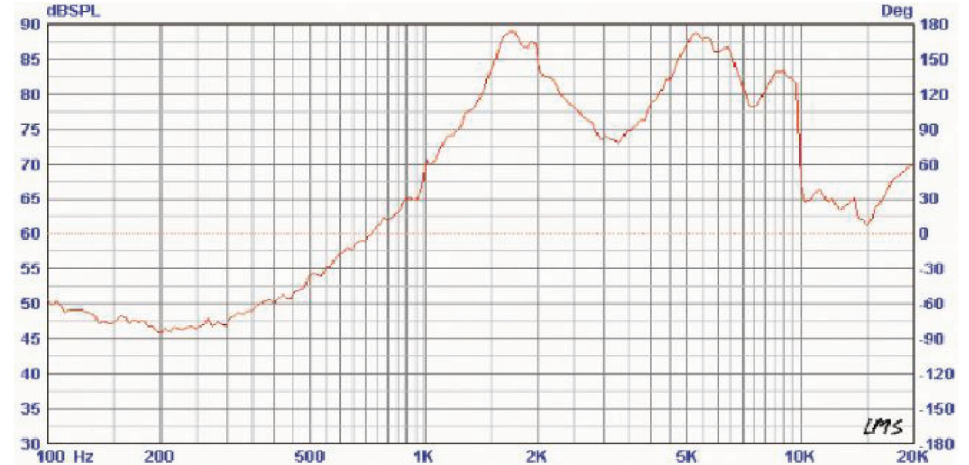

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

