

Product Code:

iPB4216SW1003-TA-12-2.8-R

Picture:



Specification:


Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
*Rated Current	(mA)	≤12
*Sound Output at 30cm	(dB)	≥100
*Resonance Frequency	(KHz)	2.8±0.5
Tone		Continuous
Operating Temperature	(℃)	-20~+70
Storage Temperature	(℃)	-30~+80
Weight	(g)	12
Housing Material		ABS
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp(20±2℃) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

SPL & Current Consumption vs. Input Voltage:

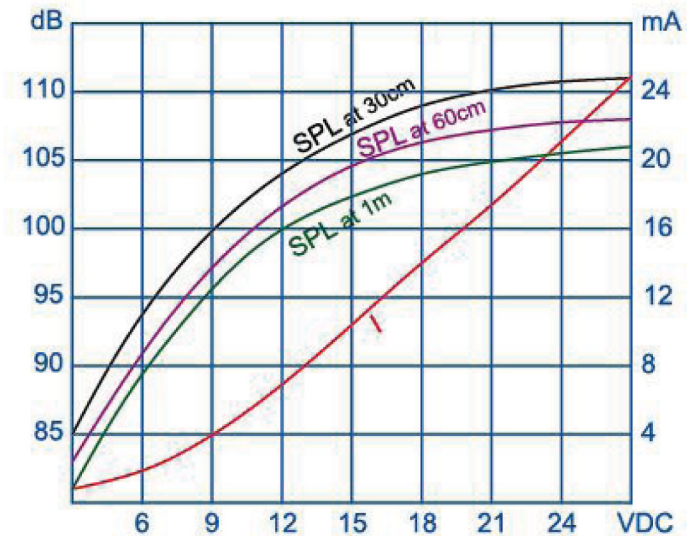

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

