


**Product Code:**

iPB5029-TA-12-2.5-22.5-R

**Picture:**



**SPL & Current Consumption vs. Input Voltage:**

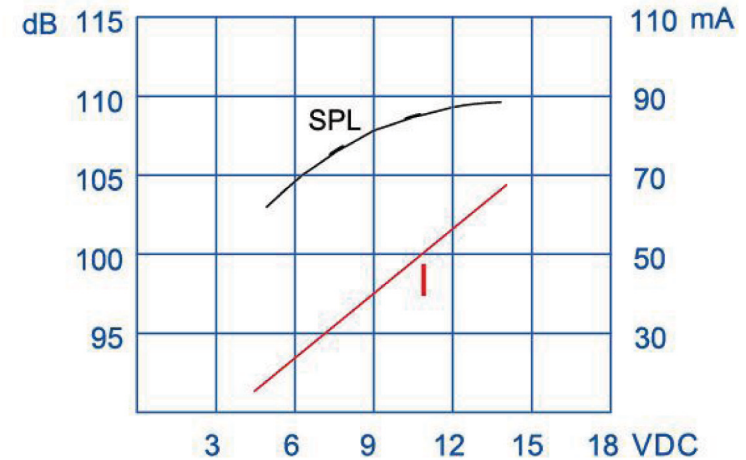

**Specification:**

|                         |       |            |
|-------------------------|-------|------------|
| Rated Voltage           | (VDC) | 12         |
| Operating Voltage       | (VDC) | 5~13       |
| *Rated Current          | (mA)  | ≤75        |
| *Sound Output at 25.4cm | (dB)  | ≥100       |
| *Resonance Frequency    | (KHz) | 2.5±0.5    |
| Tone                    |       | Continuous |
| Operating Temperature   | (℃)   | -40~+85    |
| Storage Temperature     | (℃)   | -40~+90    |
| Weight                  | (g)   | 26.7       |
| Housing Material        |       | ABS        |
| RoHS                    |       | Yes        |

**Remark: The special requirements in the test for no anti reverse connection.**

\*Value applying at rated voltage.

Test basic state: Temp(20±2℃) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

