


**Product Code:**

iPT1325S-HL-05-4.1-15-R



**Picture:**

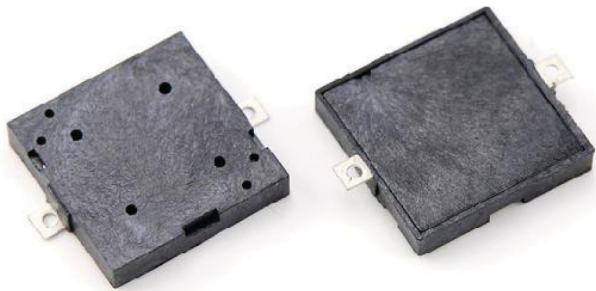


**Specification:**

|                                 |                               |           |
|---------------------------------|-------------------------------|-----------|
| Rated Voltage                   | (Vp-p)                        | 5         |
| Max Input Voltage               | (Vp-p)                        | 25        |
| *Rated Current                  | (mA)                          | ≤5        |
| Capacitance at 100Hz            | (pF)                          | 15000±30% |
| *Sound Output at 10cm           | (dB)                          | ≥85       |
| Resonance Frequency             | (KHz)                         | 4.1±0.5   |
| Operating Temperature           | (℃)                           | -40~+105  |
| Storage Temperature             | (℃)                           | -40~+120  |
| Weight                          | (g)                           | 0.5       |
| Housing Material                |                               | LCP       |
| RoHS                            |                               | Yes       |
| MSL(Moisture Sensitivity Level) | 5a(≤30℃/60%RH 24H Floor life) |           |

\*Value applying at rated voltage , 4.1KHz, 1/2 duty , square wave

Test Basic State: Temp(20±2℃),Humidity(40~70%RH),Air pressure(860~1060hPa).

**Frequency Response:**

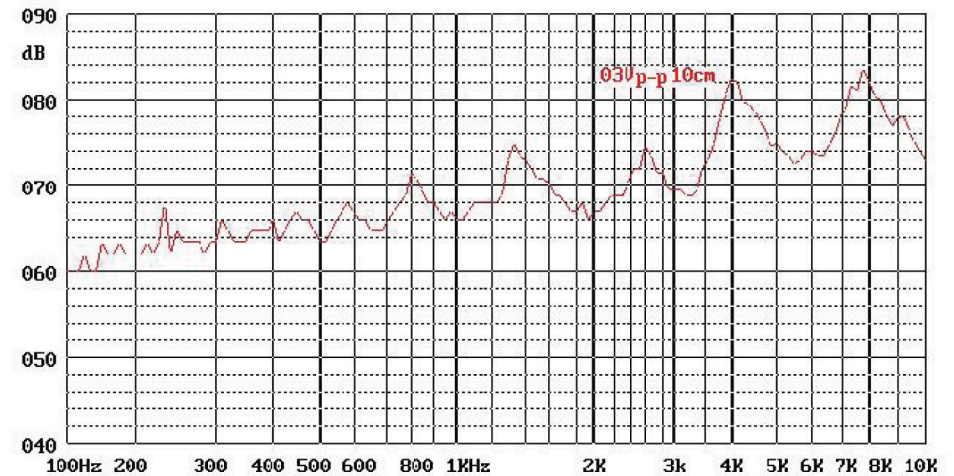

**Dimensions (UNIT: mm)**

Tolerance: ±0.5mm Except Specified

