

**Product Code:**

iET8828S-3.6L-2.7-16-R



**Picture:**




**Specification:**

|                                 |                                |          |
|---------------------------------|--------------------------------|----------|
| Rated Voltage                   | (Vo-p)                         | 3.6      |
| Operating Voltage               | (Vo-p)                         | 2.5~4.5  |
| *Rated Current                  | (mA)                           | ≤100     |
| Coil Resistance                 | (Ω)                            | 16±3     |
| *Sound Output at 10cm           | (dB)                           | ≥95      |
| Resonance Frequency             | (Hz)                           | 2700     |
| Operating Temperature           | (°C)                           | -40~+105 |
| Storage Temperature             | (°C)                           | -40~+120 |
| Weight                          | (g)                            | 0.4      |
| Housing Material                |                                | LCP      |
| RoHS                            |                                | Yes      |
| MSL(Moisture Sensitivity Level) | 5a(≤30°C/60%RH 24H Floor life) |          |

\*Applying rated voltage and resonant frequency( 1/2 duty square wave);

Test basic state: Temp(20±2°C), Humidity(40~70%RH), Air pressure(860~1060hPa).

**Frequency Response:**

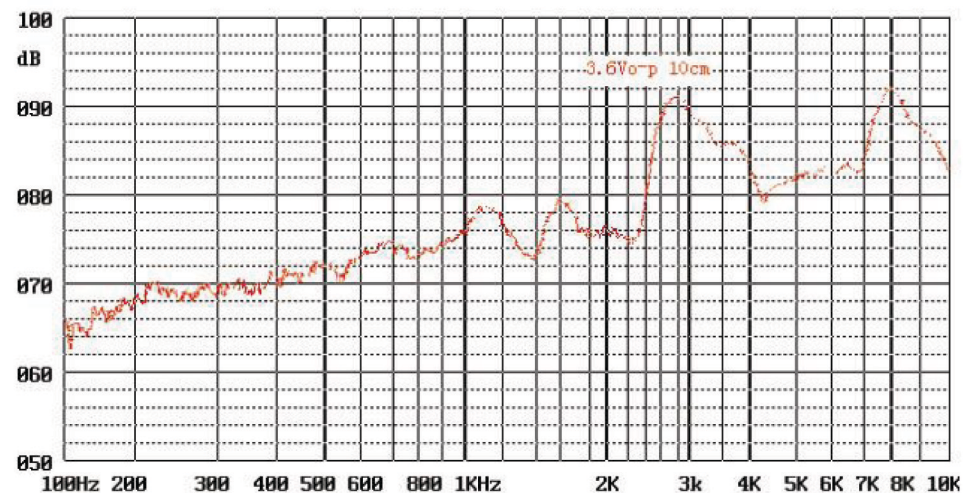

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

